


Buzzer Rectangular



Specifications:

Current Rating	: 3A / DC 12 to 24V
Operating Temperature	: -25°C to +55°C
Electrical Lifetime	: 1,000hr
Sound Pressure	: 80dB
Terminal	: Soldering Type / Plug-in Type
Wire Range	: 1 × 1.5mm ² max.
Cable Range	: 2 × 0.75mm ² / 1 × 1mm ² max.
Voice	: Continuous tone

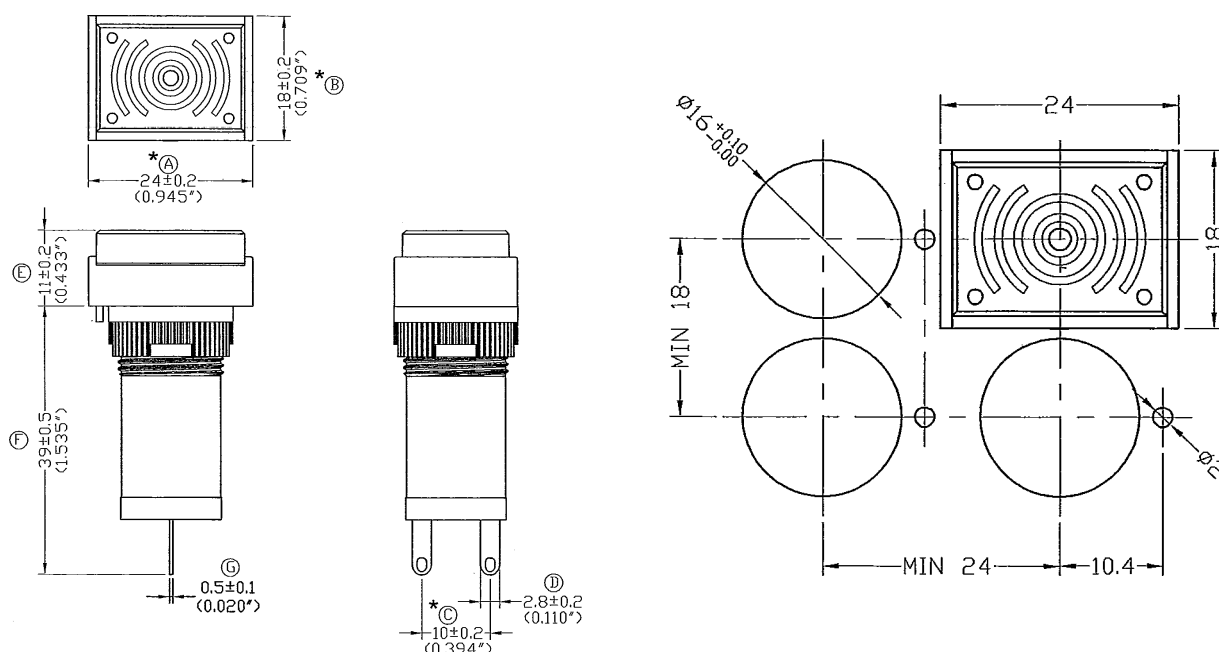

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
Buzzer, Rectangular	MCADP16B4-0T0-0140