

Piezo Element

multicompPRO

**RoHS
Compliant**




Features

- Low power consumption
- Reliable and lightweight

Specifications

Rated Max. Voltage (Vp-p Square Wave)	: 30 Vp-p
Capacitance	: 20,000 pF $\pm$ 30%
Resonant Frequency	: 4,200 $\pm$ 500Hz
Resonant Impedance	: $\geq$ 300 Ω
Operating Temperature	: -20°C to +60°C
Storage Temperature	: -20°C to +70°C
Lead Wire	: 28 AWG

Dimensions

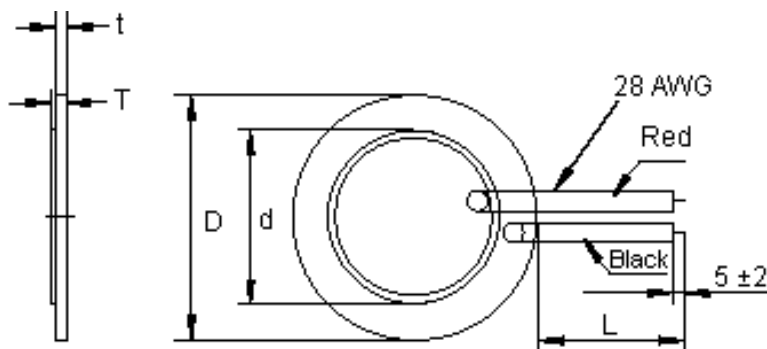

D	27mm $\pm$ 0.1
d	20mm $\pm$ 0.3
t	0.3mm $\pm$ 0.02
T	52mm $\pm$ 0.1
L	200mm

Part Number Table

Description	Part Number
Piezo Element, 27mm, 4,200Hz, Leaded	ABT-441-RC

multicompPRO