

Straight SMA Bulkhead Jack - Jack Adaptor

multicomp

**RoHS
Compliant**



Specifications

Adaptor Style	: Straight Bulkhead Adaptor
Connector Type A	: SMA Jack
Connector Type B	: SMA Jack

Electrical Specifications

Frequency Range	: DC - 18GHz
Nominal Impedance	: 50Ω
Voltage Rating	: 500V Max.
VSWR	: 1.23 Max.

Material Specifications

Bodies	: Brass per JIS-C3604
Centre Contact	: Beryllium Copper per ASTM B196 UNS C17300
Insulation	: PTFE per ASTM D1457 and ASTM D1710


Mechanical Specifications

Interface in accordance with : MIL-STD-348A

Environmental Specifications

Operating Temperature : -65°C to +165°C

Diagram

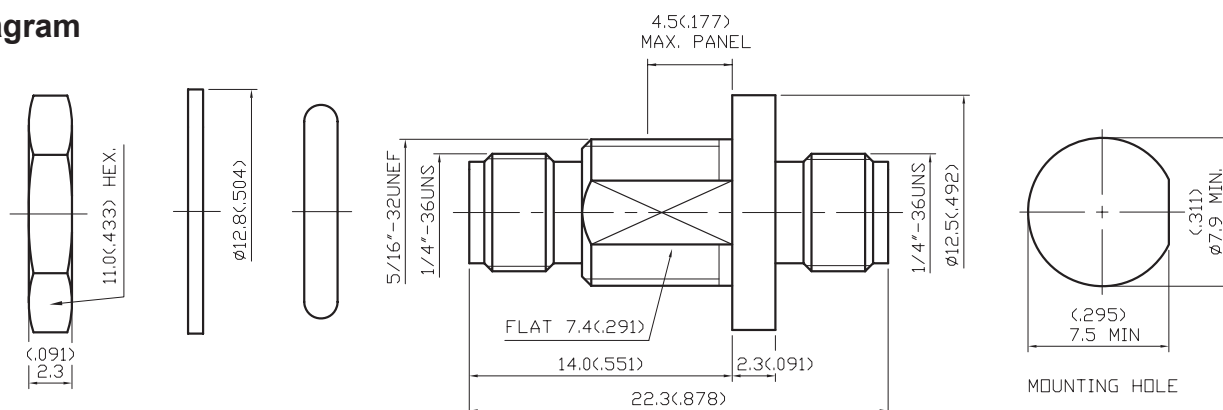

No.	Description	Material	Finish / Colour
1	Nut	Brass	Gold
2	Washer	Brass	Gold
3	Body	Brass	Gold 3μ" Min.
4	Centre Contact	Beryllium Copper	Gold 50μ" Min.
5	Insulation	PTFE	-
6	O-Ring	Silicone	Red

Dimensions : Millimetres (Inches)

multicomp

Straight SMA Bulkhead Jack – Jack Adaptor



Part Number Table

Description	Part Number
Straight SMA Bulkhead Jack – Jack Adaptor, 50Ω	19-21-1-TGG

