

SMA Straight Bulkhead Jack, Crimp



Specifications

Electrical

Frequency Range	: DC – 12.4GHz
Nominal Impedance	: 50Ω
Voltage Rating	: 500V Max.
VSWR	: 1.28 Max.

Material

Body	: Brass, 3μ" Gold Plated
Center Contact	: Beryllium Copper, 50μ" Gold Plated
Crimp Ferrule	: Brass, Gold Plated
Insulation	: PTFE
Washer	: Brass, Gold Plated
O-Ring	: Rubber, Black
Nut	: Brass, Gold Plated


Mechanical

Interface in Accordance with	: MIL-STD-348A
Cable Type	: RG-58U or Equivalent
Cable Attachment	: Outer: Crimp Inner: Solder
Crimp Size Required	: Ferrule: 5.5(.216) Hex Crimp Tool

Environmental

Temperature Range : -20°C to +80°C

Diagram

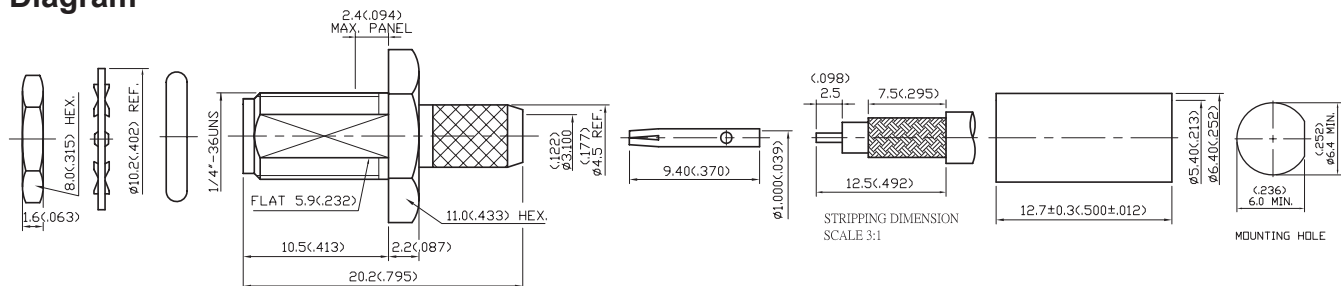

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
SMA Straight Bulkhead Jack, Crimp, 50Ω, RG-58U	19-04F-3-TGG

