

BNC Straight Plug, Crimp



RoHS Compliant

Specifications

Electrical

Frequency Range	: DC - 4GHz
Nominal Impedance	: 50Ω
Voltage Rating	: 500V Max.
VSWR	: 1.5 Max.

Material

Shell	: Zinc, Nickel Plated
Crimp Ferrule	: Brass, Nickel Plated
Center Contact	: Brass, Gold Plated
Insulation	: PTFE
Body	: Brass, 100μ" Nickel Plated
Washer	: Brass, Nickel Plated
Spring Washer	: SK-5, Nickel Plated
Gasket	: Rubber, Red

Mechanical


Interface in Accordance with	: MIL-STD-348A
Cable Type	: RG-58U or Equivalent
Cable Attachment	: Outer: Crimp Inner: Solder/Crimp
Crimp Size Required	: Contact: 1.8(0.071) Hex Crimp Tool Ferrule: 5.5(0.216) Hex Crimp Tool

Environmental

Operating Temperature Range : -20°C to +80°C



Diagram

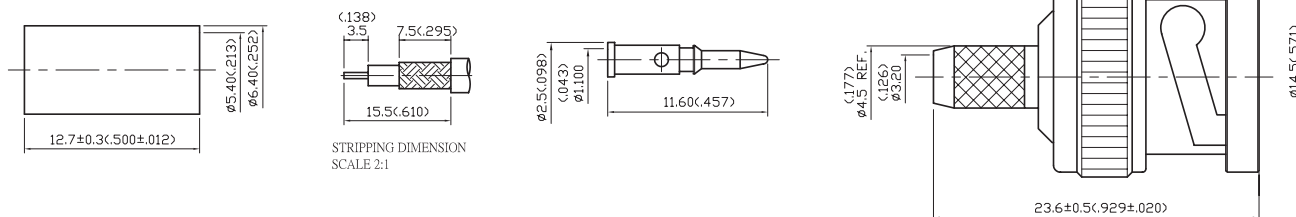

Dimensions : Millimetres (Inches)

Part Number Table

Description	Part Number
BNC Straight Plug, Crimp, 50Ω, RG-58U	13-10-1 58U

