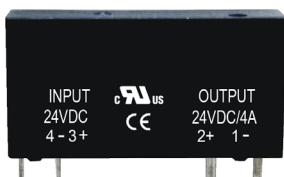


# PCB Mount Solid State Relay

## Single Phase DC Output


**RoHS  
Compliant**

### Description

This is printed board mounted DC output solid state relay. Control voltage is 12V DC and 24V DC, load current is 0.1A or 4A load voltage is 24V DC or 48V DC, dielectric strength is 2500V AC, suitable for PLC control of socket installation.

### Application

Suitable for PLC control of socket installation.

### Features

- Control voltage: 12V DC and 24V DC
- Load voltage: 24V DC, 48V DC
- Load current is 0.1A or 4A
- MOSFET output (for 4A)
- Dielectric strength: 2500Vrms
- PCB or socket mounted

### Technical Specification

Input Circuit		
Control Voltage Range	12	9.6-14.4V DC
	24	19.2-28.8V DC
Must Turn-On Voltage	12	9.6V DC
	24	19.2V DC
Must Turn-Off Voltage		1V DC
Maximum Input Current		25mA
Output Circuit		
Load Voltage Range	24	3-28V DC
	48	3-58VDC
Transient Over voltage	24	33V DC
	48	58V DC
Load Current Range	0.1A	0.001 - 0.1A
	4A	0.02 - 4A
Maximum Turn-On Time		300µs
Maximum Turn-Off Time		300µs
Maximum Surge Current (@10 ms)	0.1A	1A
	4A	48A
Maximum Off-State Leakage Current [@ Rated Voltage]		0.1mA
Maximum On-State Voltage Drop	0.1A	1.5V DC
Maximum On-state Resistance	4A	37mΩ

# PCB Mount Solid State Relay


## Single Phase DC Output

**multicomp** PRO


### General Information

Dielectric strength Input/Output (50/60Hz)	2500Vrms
Ambient Operating Temperature Range	-30°C ~ +80°C
Ambient Storage Temperature Range	-30°C ~ +100°C
Weight (Typical)	4g


### Installation Drawing

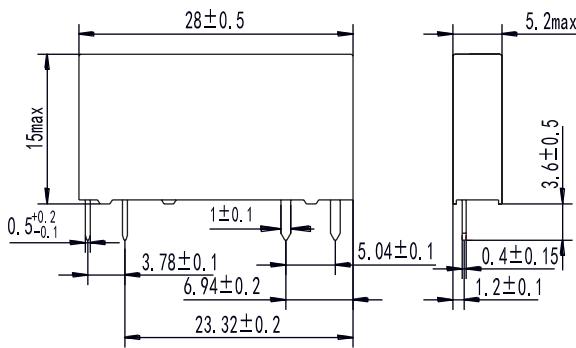

### Wiring Diagram

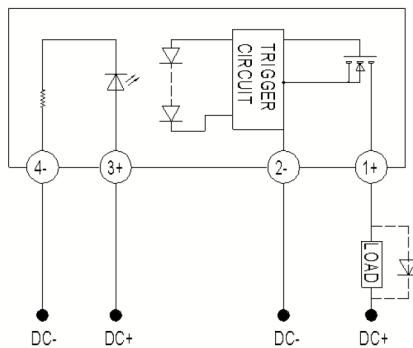

### Thermal Curve

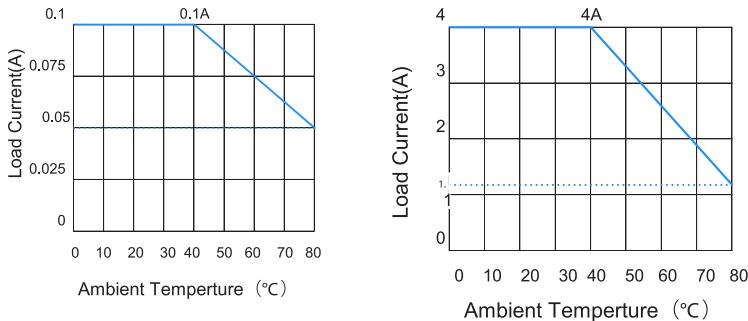

### Part Number Table

Description	Part Number
SSR, PCB Mount, 4A, 24V DC, 12V DC, Zero Crossing	MC002259
SSR, PCB Mount, 4A, 24V DC, 24V DC, Zero Crossing	MC002260
SSR, PCB Mount, 0.1A, 48V DC, 12V DC, Zero Crossing	MC002261

**multicomp** PRO