

M-UHF Female Crimp





Specifications


Impedance	: 50Ω
Frequency Range	: 0-2.5 GHz
VSWR	: 1.25 Max.
Working Voltage	: 335Vrms @ Sea Level
Insulation Resistance	: 5k MΩ min.
Temperature Range	: -65°C to +165°C

For RG-58, 58A, 58C, 141, 141A, Belden 8240, 8259, 8262, 9201, 9203, 9310, 9311 & Comm/Scope 0268


Diagram

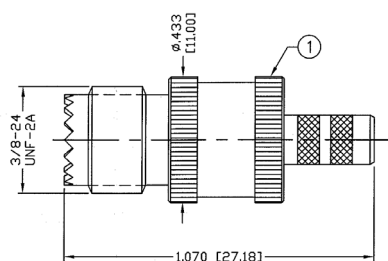

RECOMMENDED CRIMP DIE: .068



RECOMMENDED CRIMP DIE: .213



RECOMMENDED STRIPPING INSTRUCTIONS

Dimensions : Inches (Millimetres)

No.	Description	Material	Finish	Qty
1	Body	Brass	Nickel, 80μ"	1
2	Contact	Brass	Silver, 5μ"	
3	Insulator	PTFE	-	
4	Press Washer	Brass	Nickel, 80μ"	
5	Ferrule	Brass	Nickel, 80μ"	

Part Number Table

Description	Part Number
M-UHF, FEM Crimp, N,S,D; for RG-58/U, CBL GRP C	MC002052

