

Inductive Proximity Sensor - 18mm Square Plastic Housing

multicompPRO

**RoHS
Compliant**



Features

- Inductive sensor, style: squared shape, 18mm × 18mm × 31mm
- Mounting distance: 5mm shielded
- With LED operation indicate lamp, easily identifiable
- Standard sensing object: ferrous metals
- Protection rate: IP67, water resistant
- Over-current and short circuit protection; against polarity reversal.
- Widely applied in measuring, Counting, Rpm measuring in mechanism, chemical, paper manufacture light industry, etc.

Specifications

Mounting Distance	: 5mm Shielded
Sensing Distance	: 4.5mm Shielded
Power Supply	: 10V DC to 30V DC
Frequency	: 500Hz / 250Hz (DC 3/2 wires)
Current Output (DC)	: 200mA
Ambient Temperature	: -20°C to 70°C
Against Polarity Reversal	: Yes
Short Circuit Protected	: 3 wires: Yes / 2 wires: No
IP Rating	: IP67


Electrical Connection

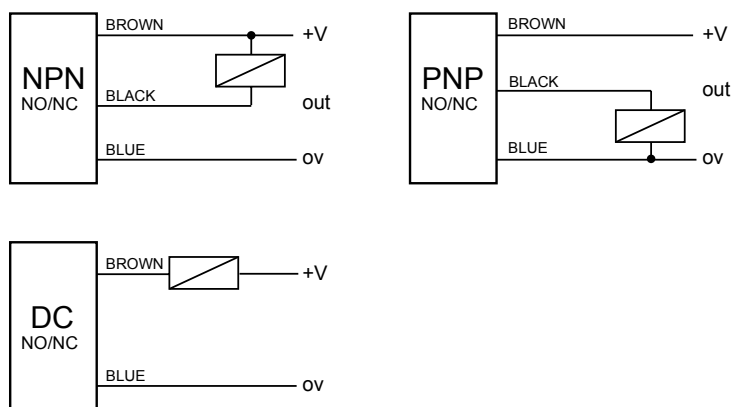

Picture Of Product

Flush (shielded)

Unit: mm

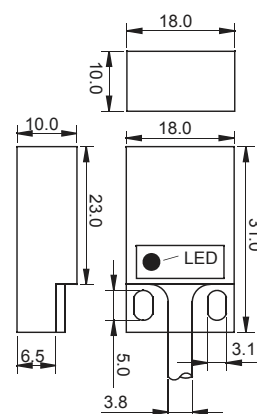

multicompPRO

Inductive Proximity Sensor - 18mm Square Plastic Housing

multicomp^{PRO}




Installation

If used in an area surrounded by metal, Install the proximity Sensor as follows . (S_n = Sensing distance)

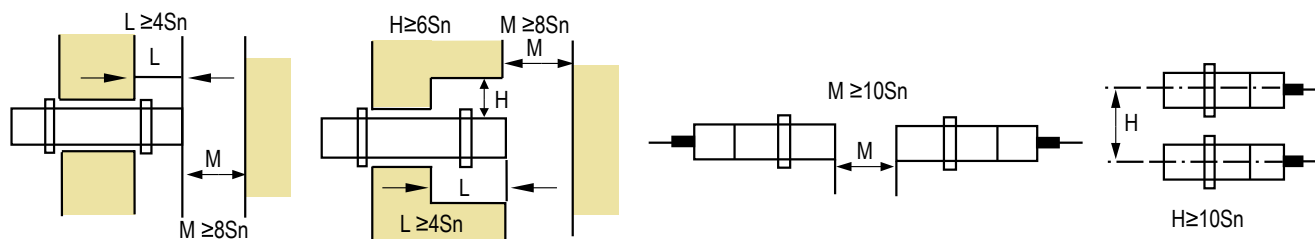


Inductive Proximity Application Direction

- Set mounting distance equal to 80% of S_n .
- Set mounting distance roughly equal to 50% of S_n when sensor is used measuring mounting frequency or operating in high speed circumstances.
- Mounting distance will change depending on material (iron, stainless steel, brass, copper and aluminium).

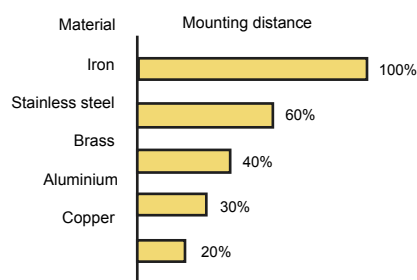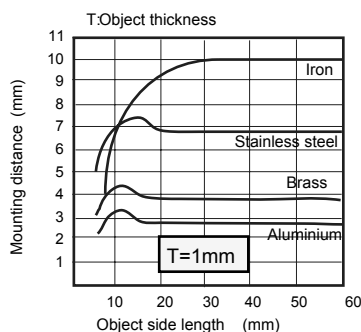

D. Inductive Proximity series connection and parallel connection

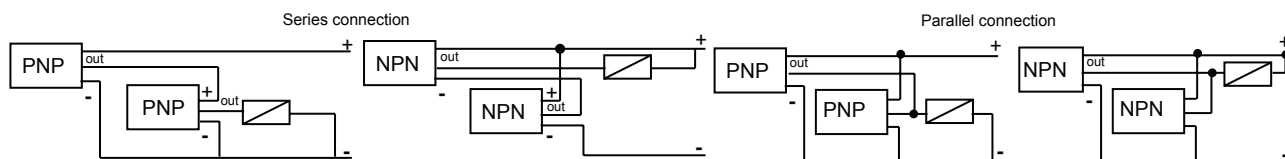
multicomp^{PRO}

Inductive Proximity Sensor - 18mm Square Plastic Housing

multicompPRO

Part Number Table

Part Number	Output Type	Mounting Distance	Current Output	Power Supply	Wire Connector
MP002217	NPN NO	5mm Shielded	$\leq 200\text{mA}$	10V DC to 30V DC	3 Wire
MP002218	NPN NC				
MP002219	PNP NO				
MP002220	PNP NC				
MP002221	DC NO				2 Wire
MP002222	DC NC				

multicompPRO