


Screened Multicore Cable to Defence Standard 61-12 Part 5 16-2-*C

pro-POWER

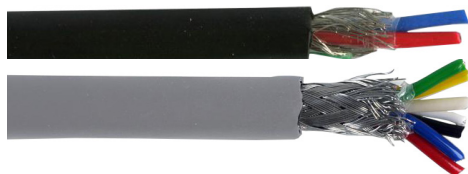

RoHS
Compliant

Description

This screened multicore cable is manufactured to Defence Standard 61-12 Part 5 and is designed for high density wiring between components and within instruments and electronic equipment. It is not to be used for the direct connection to Mains Power Supplies.

Reference Standard

Multicore Cable to DEF. STAN. 61-12 part 5. 0.5mm² (16/0.2mm) Conductors, Braid Screened with Black and Grey PVC Jacket

Cable Construction

Conductor

Electrolytic Annealed Tinned Copper Conductor 16/0.2mm

Nominal Core Resistance @ 20°C : 40.1Ω/km

Current Rating (per core) : 2.5 Amp

Insulation and Conductors

Core insulation of PVC to BS676 type Nom. Radial Thickness 0.45mm

Insulation Resistance : Min. 200MΩ/km

Nominal Overall Ø of Conductor : 1.83mm

Conductors Colour Coded as per DEF. STAN. 61-12 Part 4

Cores wrapped with Plastic Tape

Test Voltage (1 minute, core to core) : 2000V

Braid Screen

0.2mm Ø TACW Braid Fill factor 70% (nom)

Outer Sheath

Black and Grey (RAL 7001) PVC jacket to BS6746 Type 6

Temperature Range : 0°C to +70°C

Nominal Voltage : 440V AC rms @ 1600Hz

Minimum Bending Radius : 6 × cable Ø

Insulation Colours table

Core Number	Colour
1	Red
2	Blue
3	Green
4	Yellow
5	White
6	Black

Core Number	Colour
7	Brown
8	Violet
9	Orange
10	Pink
11	Turquoise
12	Grey

Core Number	Colour
13	Red/Blue
14	Green/Red
15	Yellow/Red
16	White/Red
17	Red/Black
18	Red/Brown

pro-POWER

Screened Multicore Cable to Defence Standard 61-12 Part 5 16-2-*C

pro-POWER

Part Number Table

Description	No. of Cores	Jacket Colour	Diameter over Cores (mm)	Diameter over Screen (mm)	Jacket Radial Thickness (mm)	Jacket Diameter (mm)	Reel Length (m)	Part Number
Cable, Screen, DEF 16-2-2C	2	Black	3.7	4.7	0.9	6.5	25	PP000348
						100	PP000349	
Cable, Screen, DEF 16-2-3C	3		4	5		6.8	25	PP000350
						100	PP000351	
Cable, Screen, DEF 16-2-4C	4	Grey	4.4	5.4		7.3	25	PP000352
							100	PP000353
				25			PP000254	
				100			PP000255	
Cable, Screen, DEF 16-2-6C	6	Black	5.5	6.5		8.3	25	PP000354
		100					PP000355	
	Grey	25	PP000256					
		100	PP000257					
Cable, Screen, DEF 16-2-8C	8	Black	6.1	7.1		8.9	25	PP000356
						100	PP000357	
Cable, Screen, DEF 16-2-12C	12	Grey	8.4	9.4		10.5	25	PP000358
							100	PP000359
				25			PP000258	
				100			PP000259	
Cable, Screen, DEF 16-2-18C	18	Black	9.2	10.2		12.5	25	PP000360
		100					PP000361	
	Grey			100			PP000260	

pro-POWER